


C GROUND CABLE TERMINATION DETAIL AT 17 PLAN VIEW

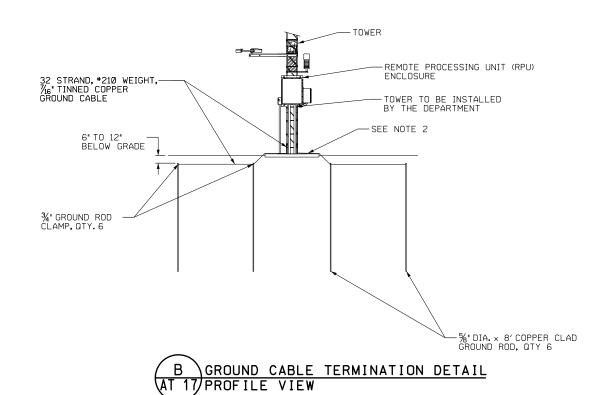

NOTES:

- 1. PLACE GROUND CABLES ON THE TOP CONCRETE PAD.
- 2. ANCHOR GROUND CABLES FLAT AGAINST CONCRETE PAD WITH SUITABLE CLAMPS/ANCHORS, LEAVE EXCESS WIRE TO BE ATTACHED TO TOWER BY THE DEPARTMENT.
- 3. DUCT SEAL UNDERGROUND CONDUIT OPENING AFTER INSTALLING GROUND WIRE.
- 4. INSTALL GROUNDING WIRE AND RODS ON ALL THREE LEGS. COIL 10 FEET OF WIRE ON LEG CLOSEST TO CONDUIT. COIL 5 FEET OF GROUNDING WIRE ON OTHER LEGS.

TRANSPORTATION

BRIDGE CONSTRUCTION Ы UTAH GROUND ROD INSTALLATION TOWER GROUNDING AND STD DWG AT 17